

# GV8


GV8 type gauge valve is a block and bleed needle pattern gauge valve with specially designed integral bleed of M8. Ideal for use on applications requiring bleeding or venting of media. Self centering needle non-rotating, on the valve seat. The conical metal tip (stem type CT) press fitted ensures perfect alignment for positive bubble tight shut-off. Standard end connections are male inlet and female outlet or female inlet and female outlet from 1/4" to 3/4".

## Technical specifications

<b>Design Pressure</b>	: 6000 PSI
<b>Max temp.</b>	: 240°C
<b>Material</b>	: Stainless Steel
<b>Stem</b>	: (CT) Conical tip press fitted hard chrome plated.
<b>Gland Packing</b>	: PTFE
<b>Stem packing area</b>	: Burnished finish for smooth valve operation.
<b>Safety Feature</b>	: Back seating for Preventing stem blowout.

Size	Type	Length A	Width B	Height (open) Max., C	Handle D	Handle OD E
1/4"	FxF	70	25	65	40	10
	MxF	70	25	65	40	10
	MxM	75	25	65	40	10
3/8"	FxF	70	25	65	40	10
	MxF	70	25	65	40	10
	MxM	75	25	65	40	10
1/2"	FxF	75	32	86.6	50	12
	MxF	83	32	86.6	50	12
	MxM	88	32	86.6	50	12
3/4"	FxF	75	38	86.6	50	12
	MxF	83	38	86.6	50	12
	MxM	88	38	86.6	50	12


All dimensions are in mm.

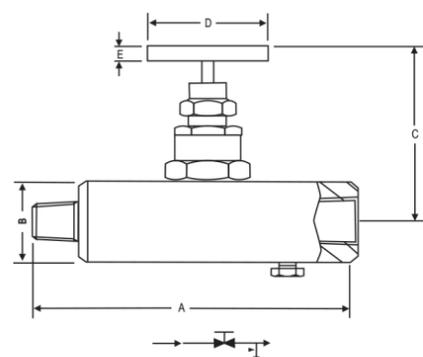


Type MF

## Applications

- Installation of instrument and gauge.
- isolation of Instrument.
- Venting of Instrument.
- Liquid and vapor service

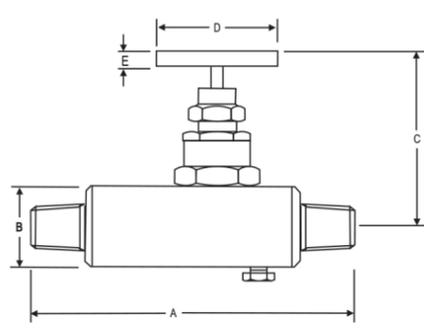

Type MM

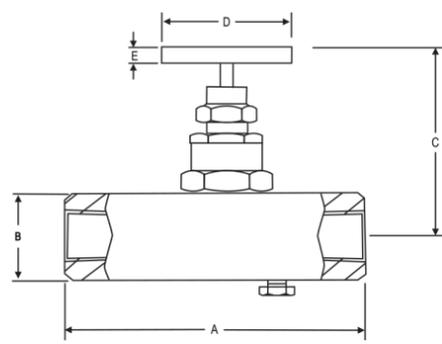

Type FF

Optional : GV 10 - High pressure valves for 10,000 psi pressure  
GV 20 - High pressure valves for 20,000 psi pressure

Note : Other combination sizes available on request. Please contact us for more details.

# GV8

## How to order : Gv8

Body Material	Stem	Size	Connections (inlet x outlet)	Threads
C = Carbon Steel	Packing	24 = 1/4" x 1/4"	FF = Female x Female	N = NPT (ANSI B 1.20.1)
S = SS 316	P = PTFE	33 = 3/8" x 3/8"	MF = Male x Female	P = BSPP (BS 2779, ISO 228/1)
S4 = SS 304	G = Grafoil	44 = 1/2" x 1/2"	MM = Male x Male	B = BSPT (BS 21, ISO 7/1)
SL = SS 316L		46 = 1/2" x 3/4"	SW = Socket Weld	
M4 = Monel 400		64 = 3/4" x 1/2"		
M5 = Monel 500		66 = 3/4" x 3/4"		
H = Hastelloy C				
B = Brass				

### Options -

- IE : Handle circular.
- TF : Compliance to NACE standard MR-0175.
- SG : For Oxygen service, valves are supplied cleaned, degreased and suitably packed.
- GH : Material test certificate
- GO : Hydro test certificate
- D4 : 1/4" NPT (M) Drain Plug instead of M8 bleed
- BLD4 : Bleeder 1/4" NPT (Male)

### Example

To place an order simply refer to the codes in the table.

Valve Type : Body Material + Stem Packing+ Size + Connections + Threads + Options

GV8 + S + P + 44 + MF + N = GV8 - S - P - 44 - MF - N - Options

Note -

The weld prepared types are available with a male-or-female plain end - suitable for socket weld, or male butt weld end. Always specify pipe schedule and further requirements when ordering valves for welded or Flange connections. Panel mounting option for installation in racks and panels.

## Standard Valve Materials

Valve	Body	Bonnet	Stem	Tip
Carbon Steel	CS A105	CS A105	SS 304	SS 304
Stainless Steel	SS 316	SS 316	SS 316	SS 316
Monel	Monel	Monel	Monel	Monel